



→ Hydraulic ramp for trucks, trailers and semi-trailers

DH-AR... • 3000 - 16000 kg




The **DH-AR1...** are basic ramps with a **non-articulated steel platform**.

The **DH-AR2...** are ramps with a **longer, articulated platform**. The top and bottom platform sections are linked with **stabilisers**, so that they work synchronised, as a pair.





The **DH-AR3/4...** also have a **longer, articulated platform**. But the top and bottom platform sections are linked with **2 additional hydraulic cylinders**, so that both platform sections can be operated independently. The DH-AR4... can be used as bridge at the loading dock.

Load capacity

CAP
3000 kg
5000 kg
9000 kg
16000 kg

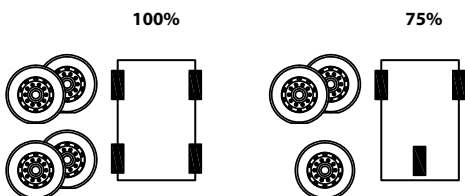

Heavy duty hydraulic ramp with steel platform



Technical specifications

Lift frame	140 x 80 mm tube mounted at the rear cross member of the loading floor
Cylinders AR1...	2 tilt cylinders
Cylinders AR2...	2 tilt cylinders + 2 stabilisers
Cylinders AR3 / 4...	2+2 tilt cylinders
Hydraulic stabilising legs	Available as an option (OAH010)
Standard platform depths	AR1...: 2500 mm AR2-3-4: 2000 + 2000 mm Other depths on request (OAP302.S)
Standard platform width	Variable per increments of 5 mm
Standard control unit	Exterior control box with turn buttons, a safety switch and battery isolator switch
Standard finish of the lift frame	Protection PLUS [OAT102]